



AMERICAN SPECIALTIES, INC.


441 Saw Mill River Road, Yonkers, NY 10701 (914) 476-9000

MODEL No: 0535

ISSUED: 1-87

REVISED: 9-04

FIXED ANGLE TILT MIRROR

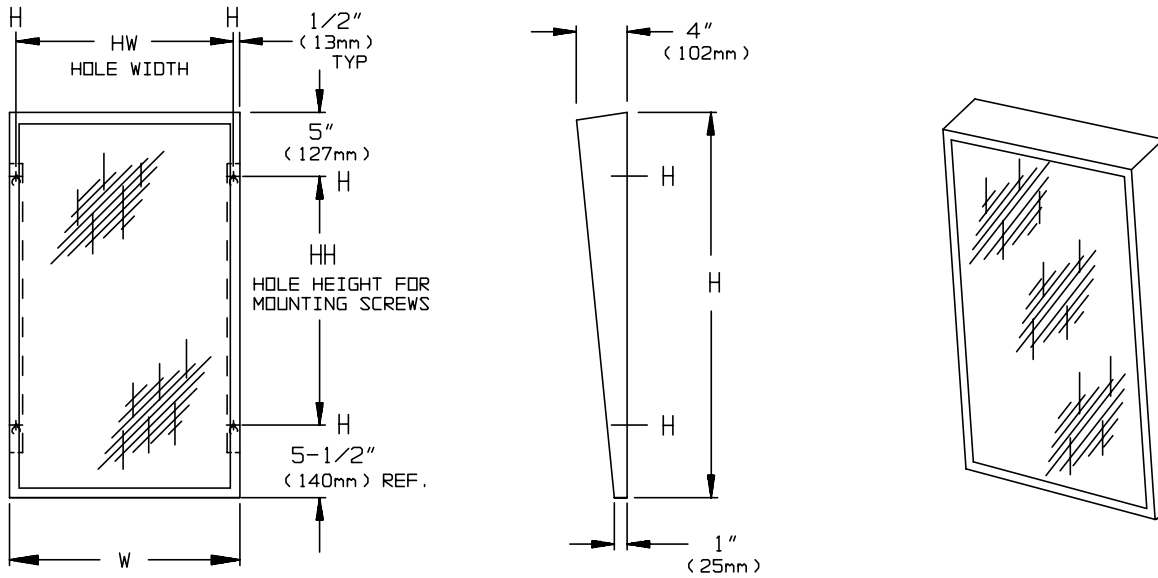

SPECIFICATION

Fixed Angle Tilted Mirror shall be fabricated of alloy 18-8 stainless steel, type 304, 20 gauge. Face shall be one piece construction free of miters or spot welded seams. All exposed surfaces shall have N°4 satin finish and be protected during shipment by plastic PVC film easily removable after installation. Concealed tamper resistant locking devices shall be provided. Mirror shall be _____ (INSERT GLAZING OPTION) and shall be warranted for 15 years against silver spoilage. Mirrors shall be supplied as standard with glazing option ' A '. For a complete description and other choices of glazing options, see the Mirror Glazing OPTIONS Chart.

Fixed Angle Tilted Mirror shall be Model N° 0535- _____ (insert size code) - _____ (insert glazing option) manufactured by American Specialties, Inc., Yonkers, NY 10701-4913.

INSTALLATION

Unit is surface mounted on wall or partition using four (4) N°10 self tapping screws (by others). Mounting holes through back are "keyhole" slots for hanging unit on pre-installed screws. Unit requires 5/8" (16mm) clearance at top to engage screws in keyhole slots. For compliance with ADA Accessibility Guidelines, bottom of reflecting surface should be installed 40" (1016mm) max. above finished floor.

AVAILABLE MODELS

MODEL NUMBER	DIMENSIONS			
	W	H	HW	HH
0535-1630-__	16" (406mm)	30" (762mm)	15" (381mm)	19-1/2" (495mm)
0535-1824-__	18" (457mm)	24" (610mm)	17" (432mm)	13-1/2" (343mm)
0535-1830-__	18" (457mm)	30" (762mm)	17" (432mm)	19-1/2" (495mm)
0535-1836-__	18" (457mm)	36" (914mm)	17" (432mm)	25-1/2" (648mm)
0535-2430-__	24" (610mm)	30" (762mm)	23" (584mm)	19-1/2" (495mm)
0535-2436-__	24" (610mm)	36" (914mm)	23" (584mm)	25-1/2" (648mm)

Accessory Specialties

AMERICAN DISPENSER

Desert Ray Products

WATROUS INC.